



Shown with optional AN-8 to 15mm Spigot (I5822) and AN-6 Male to M10 x 1mm (I5826) Fittings.


Specifications

Weight	655 grams
External Materials	Aluminium Housing
Inlet Fitting	19mm
Outlet Fitting	9mm
Impeller	Helical Screw Type
Terminal Post	Positive M4, Negative M5
Min Voltage Input	6 vdc
Max Voltage Input	16 vdc
Current Draw at 3bar (43 psi)	11.2 amps (13.8vdc)

Application Hint

Ensure fuel is always clean and filtered.
Check filter replace as required.

Dimensions

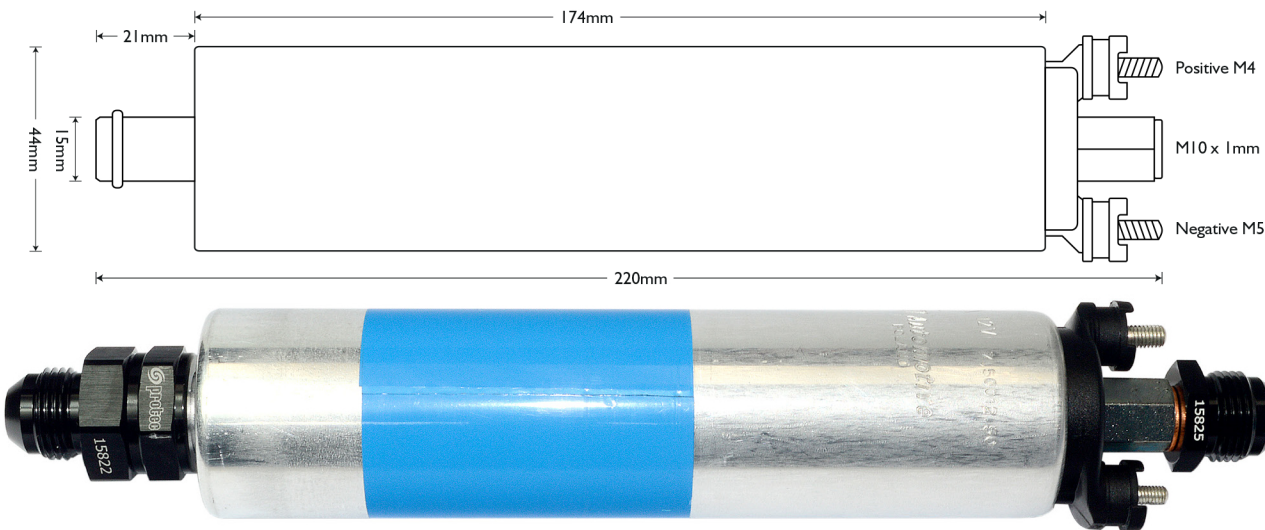


Shown with optional AN-8 to 15mm Spigot (I5822) and AN-8 Male to M10 x 1mm (I5825) Fittings.

High Performance Fuel Pump

- Over 400ltr/h open flow
- Internal Check Valve
- Unique serial number, full traceability
- Suitable for ALL popular race fuels
- Suitable for Ethanol up to E85
- Quiet and reliable Helical screw type impeller, over 4000hr lifetime. (as per AKLH Standard)
- 1 Year Warranty

Delivery Characteristics

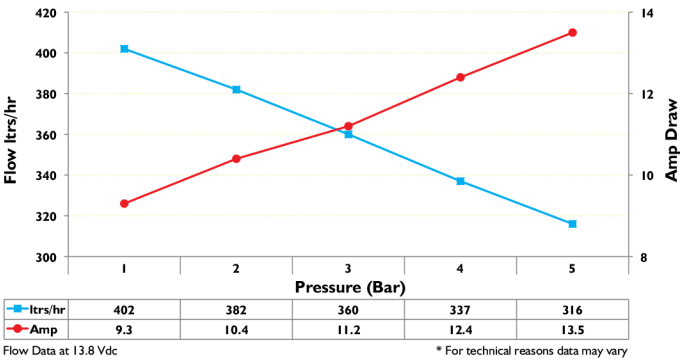

Associated Parts

- I5822 AN-8 Male to 15mm Spigot, Black
- I5824 AN-6 Male to M10 x 1mm Adaptor, Black
- I5825 AN-8 Male to M10 x 1mm Adaptor, Black
- I5826 AN-6 Male to M10 x 1mm Adaptor, Stainless
- I5827 AN-8 Male to M10 x 1mm Adaptor, Stainless