



**PLUG 'N' PLAY ADAPTER HARNESS
FOR NEXUS S3 ECU**

SUPPORTED MODELS:

Toyota Supra JZA80 2JZ-GTE (Non VVT-i)
Toyota Supra JZA80 2JZ-GE (Non VVT-i)
Toyota Aristo JZS147 2JZ-GTE (Non VVT-i)
(Manual Transmission Only)


QUICK START GUIDE

HT-186369



9 356450 015394

ADAPTER HARNESS OVERVIEW

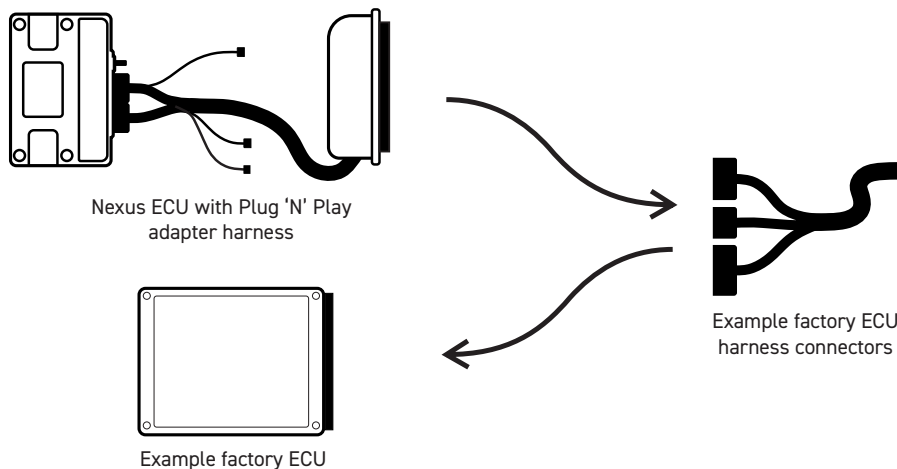

Congratulations on your purchase of a Nexus Plug 'N' Play adapter harness for your vehicle. This vehicle-specific adapter harness enables you to seamlessly integrate a Nexus S3 ECU into your vehicle without the complexities of wiring an ECU. With this hassle-free solution, you can dive straight into tuning.

Nexus ECUs stand at the forefront of engine management systems, featuring cutting-edge technology and innovative features. Designed for

the next generation of automotive enthusiasts and professionals, this state-of-the-art ECU seamlessly combines powerful engine control with a range of additional functionalities, making it a versatile and comprehensive solution for everyday driving to high-performance racing.


With full compatibility with a myriad of Haltech devices, it streamlines the configuration of engine parameters and additional functionalities, all programmable using a single piece of software.

What's in the box?

- HT-186369 - Toyota Supra JZA80 2JZ Non VVT-i Nexus Plug 'N' Play adapter
- HT-010200 - Intake air temperature sensor (M14 x 1.5 thread)
- Quick Start Guide

Application Notes

- This Toyota Supra JZA80 2JZ Non VVT-i Nexus Plug 'N' Play adapter harness is compatible exclusively with a Nexus S3 ECU.
 - Ensure that the correct basemap is uploaded into the ECU before powering the unit through the Plug 'N' Play adapter harness.
 - Please note that the basemap serves as a starting point only, and the ECU will require appropriate tuning. Haltech will not be held responsible for engine damage due to the improper use of basemaps.
 - Factory MAP sensor notes - The Toyota JZA80 2JZ-GTE factory MAP sensor is only capable of reading up to 18 psi of boost. For applications where boost levels exceed this value, it is required to use a suitable MAP sensor such as the ECU onboard MAP sensor (up to 43.5 psi) or wire an external one, such as a HT-010136 Motorsport 4-bar MAP sensor.
 - If the vehicle uses a distributor (2JZ-GE), and the distributor is not getting an ignition signal, the Nexus S3 ECU Ignition Output 1 (Pin A27) and Ignition Output 6 (Pin A32) will need to be swapped around due to different pin locations on some variants of the 2JZ-GE engine harness.
- 1998 Toyota Supra notes: On some 1998 model Toyota Supras, you may experience difficulty getting the ECU to sync with the crank and cam sensors. The reason is that the rear cam sensor (G2) is grounded differently. Therefore, the following wiring changes will need to be done for the ECU to read the front cam sensor (G1) instead:
- On the 120-pin factory engine harness connector (use the pinout reference below):
1. Move the orange wire from location B6 (G-) to location B5, which is blank from the factory.
 2. Swap the white wire at location B16 (G1) with the black/white wire at location B15 (G2).
 3. In the NSP software, reset the TDC offset angle between 370-372°.
- De-pinning the factory engine harness connector:
1. Gently pry on the lower edge to remove the yellow lock pin.
 2. Using the correct pin removal tool, lift the pin retainer tab while applying light pressure on the wire.
 3. Relocate wires according to the instructions above.
 4. Reinstall the yellow pin lock.

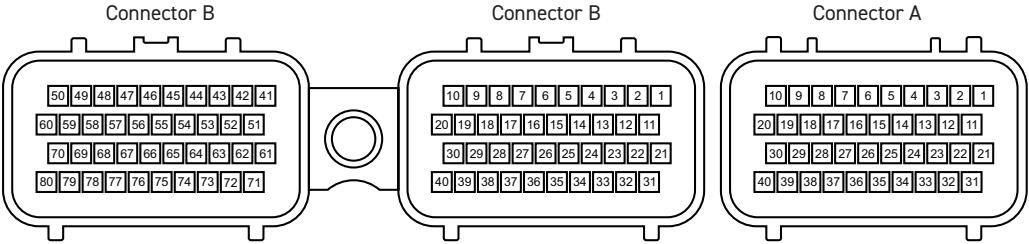

Pinout reference
(Wire side of the factory engine harness connector.)

Uploading the correct basemap

Your Nexus ECU can communicate with a laptop in low power mode using just a USB cable connection. This feature enables you to upload the basemap without powering the ECU through the Plug 'N' Play adapter harness. This ensures that all the ECU inputs and outputs are configured specifically for your engine before powering the vehicle up.



To upload the correct basemap into your Nexus ECU, follow these general steps:

1. Install/Open Haltech NSP: Haltech Nexus Software Programmer (NSP) is the software tool for configuring and tuning your Nexus ECU. Download

and install NSP from the Haltech website to your Windows laptop if you haven't already done so. Instructions on how to install the software are available in the quick start guide that came with your Nexus ECU.

2. Connect to the ECU: Use the included USB-A to USB-C interface cable to connect your laptop to the Nexus ECU.

3. Upload the Basemap: Once connected, initiate the upload process by clicking on the File Menu, then click on Import/Upload, then navigate to the Haltech basemaps folder. Typically, this will be in Documents > Haltech > Nexus Maps and Data Logs > Base Maps. Choose the correct basemap file for your application as shown in the next page, then click Open.

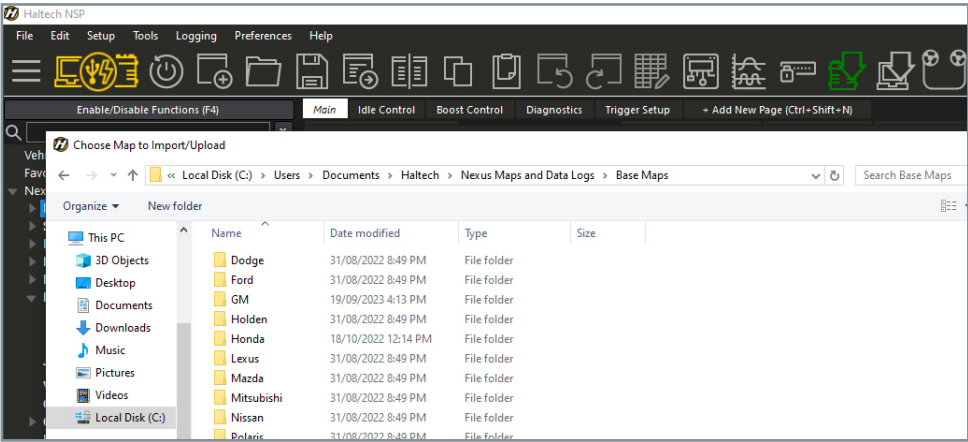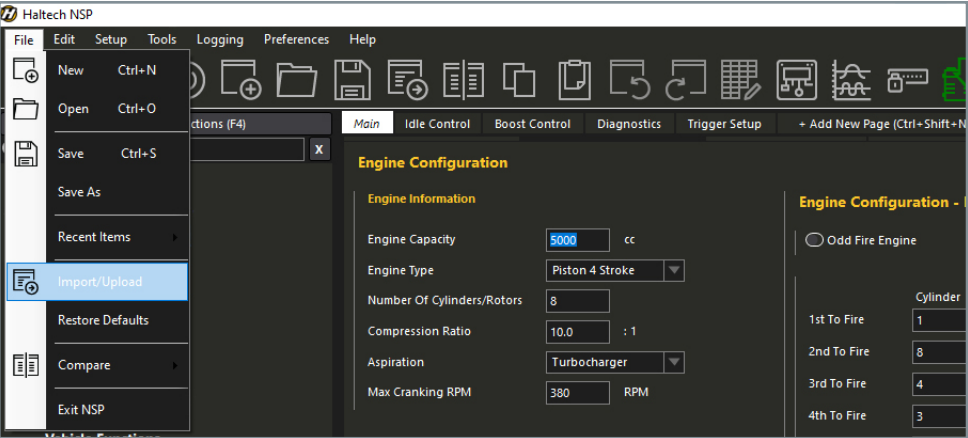


4. Upload All Settings: After opening the file, the NSP software will give you the option to upload specific parts of the map or to upload all the settings. Click on "Upload All" to copy all the base settings to your Nexus ECU. After NSP writes all the settings, click on the Reboot button to reinitialize the ECU.

5. Configure Application-Specific Settings: If you are using non-standard components on your engine, you will need to reconfigure the Nexus ECU to suit before connecting the unit to the Plug 'N' Play adapter harness and powering up the vehicle. These

may include changing injector sizes/flow rates, adjusting ignition coil settings, or reconfiguring the trigger settings to match an aftermarket trigger kit.

6. Setup the Internal Jumpers: Some adapter boxes feature internal jumpers that you can set to suit specific vehicle models. If you need to change the jumper settings beyond the default configuration, open up the adapter box and follow the instructions provided in the previous section.

At this stage, the Nexus ECU and Plug 'N' Play harness are now ready to be installed into the vehicle for the initial start-up.

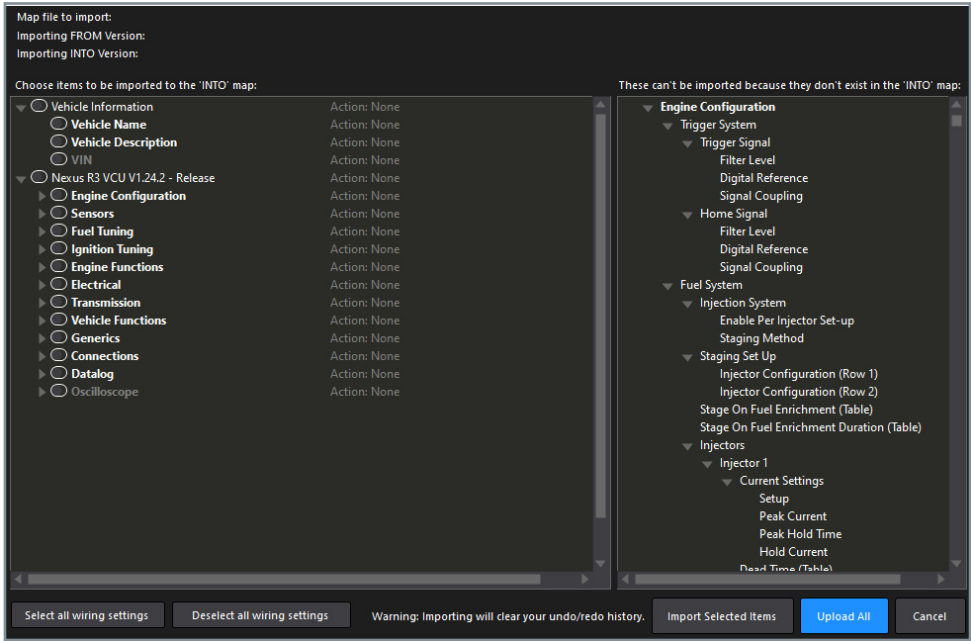


Wideband Oxygen Sensor


A Wideband Oxygen Sensor is a valuable tool for tuning your engine, as it measures a wide range of Air-Fuel Ratio (AFR) values that the engine operates within.

The Nexus S3 ECU supports onboard wideband oxygen sensor control, specifically designed for Bosch LSU 4.9 or NTK wideband sensors, which can be selected through the NSP software.

The adapter harness is equipped with a Deutsch DTM-6 connector, allowing direct connection to the Haltech Wideband Hardware packs shown below (sold separately).

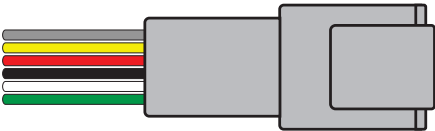

Wideband Connector (DTM04-6P)

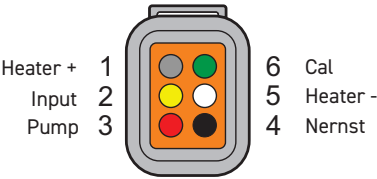

(Wire side view)


In addition to tuning, you can configure the Nexus ECU to adjust fueling to actively target the desired AFR (i.e. O2 control), or implement an engine protection strategy if the sensor detects that the engine is running too lean.



HT-010746 - Bosch LSU4.9
Wideband Hardware Pack



HT-010747 - NTK LZA08-H5
Wideband Hardware Pack

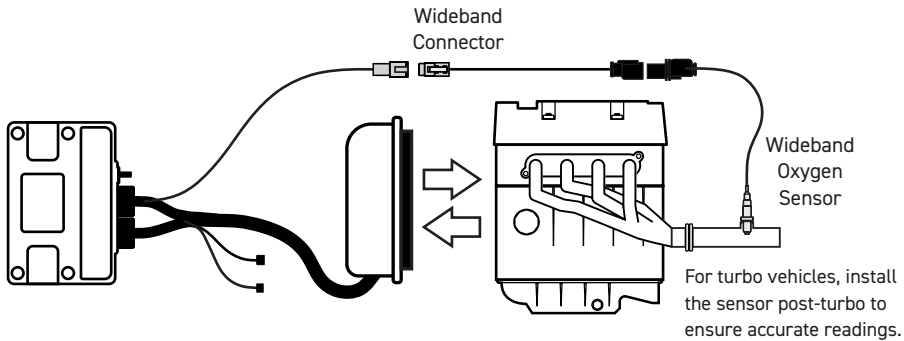


Example diagram showing how to directly connect and install a Bosch LSU4.9 Wideband Oxygen Sensor.


Haltech CAN System

The Nexus S3 ECU adapter harness is fitted with a DTM-4 CAN connector labelled as "CAN 1", which can be utilized with a range of Haltech CAN expansion products.


The diagram below illustrates example connections to multiple Haltech CAN devices (sold separately) or to a CAN WB1 / WB2 wideband module which requires external power.

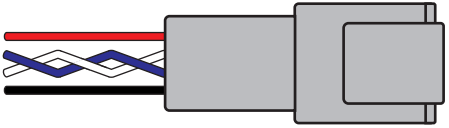

Haltech CAN 1 Connector (DTM04-4P)

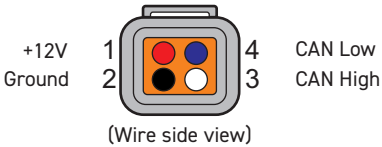

(Wire side view)

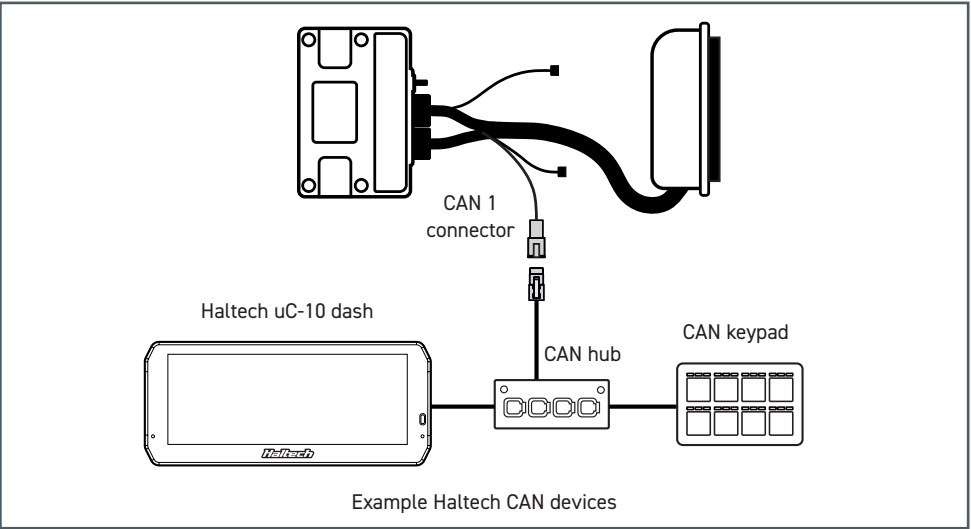

SENSORS AND ECU LOCATION

Air Temperature Sensor

An air temperature sensor is a crucial component used in Volumetric Efficiency (VE) tuning to compensate for changes in air density caused by temperature variations.




Cold air, being denser than warm air, requires more volume of fuel to maintain the same air-fuel ratio. With this information available, the Nexus ECU can automatically adjust fuel delivery based on temperature changes using the signal received from the air temperature sensor.

While many vehicles include a factory air temperature sensor, it is often located within the Mass Air Flow (MAF) sensor assembly or integrated into the intake air manifold. Typically, performance applications involve the removal of the MAF sensor or even changing the entire intake manifold. In such cases, an air temperature sensor (HT-010200) is provided as a replacement for the factory sensor.

Mounting the included sensor in the optimal position is crucial to accurately measure the air temperature entering the combustion chamber. Typically, a good location is just before the throttle body and after a turbocharger/intercooler if using forced induction. It's essential for the sensor to be in the moving air stream for rapid response times and to minimize heat soak effects. Caution must be exercised when mounting the sensor directly into the inlet manifold, especially at the rear, as this may lead to heat soak issues, where the sensor reads the manifold temperature rather than the air moving through it.

Once a suitable position is identified, a hole must be drilled and tapped to accommodate the sensor. A weld-on bung may also be used if necessary. It's recommended to remove the air intake pipe or relevant intake hardware when installing the sensor to prevent metal shavings from entering the engine.

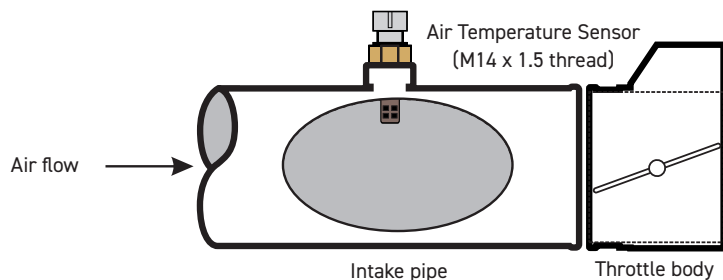

Example installation location of the included air temperature sensor

Included in this package is an air temperature sensor (HT-010200), which can be wired using the factory air temperature sensor wiring or a spare AVI or SPI, along with a signal ground connection available in the 16-pin Auxiliary connector at the rear of the adapter box. These sensors are not polarity sensitive, so either pin can be wired to either wire.




ECU Internal MAP Sensor (4 Bar)

The basemaps provided with this product will either utilize the factory MAP sensor, if the vehicle is equipped with one from the factory, or utilize the Nexus S3 ECU's Internal MAP sensor. You can check this in the software settings under Sensors > Manifold Pressure > Wiring > Input Type to see which one is being used.


If the ECU internal MAP sensor is selected, a vacuum hose must be connected from the ECU's MAP sensor barb to a vacuum port on the engine's

intake manifold. This onboard sensor is a 4 Bar MAP sensor capable of reading vacuum and boost pressures up to 43.5 psi. No user calibration is necessary for this sensor.

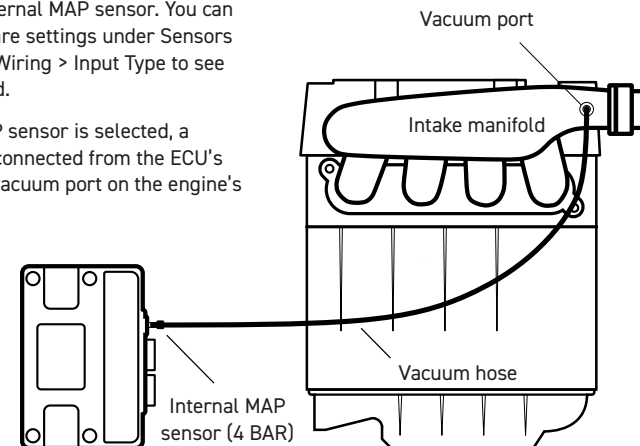


ECU location

The factory Toyota Supra JZA80 ECU is located behind the passenger side kick panel. Removal of the panel allows the installation of this Haltech Plug 'N Play product. Below is a generic illustration for reference.

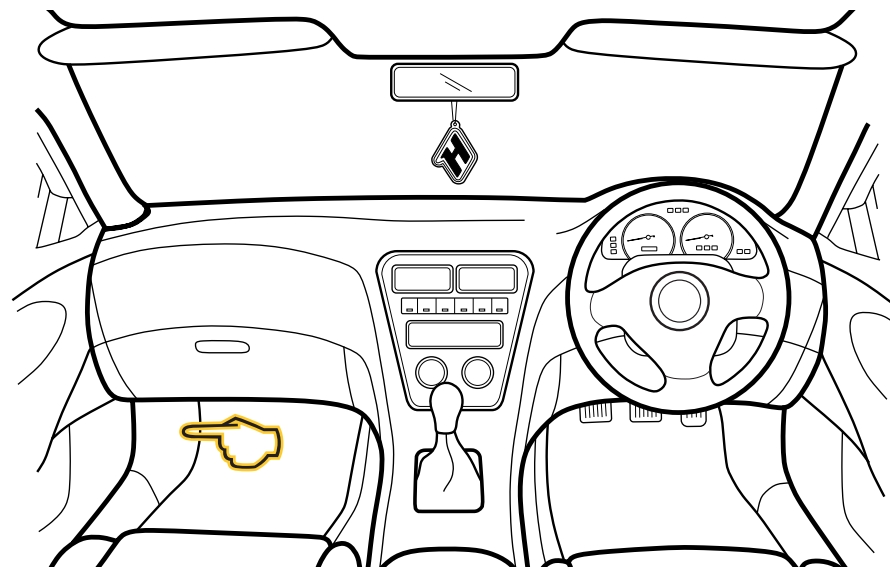

ADAPTER PINOUT REFERENCE

Vehicle connector:

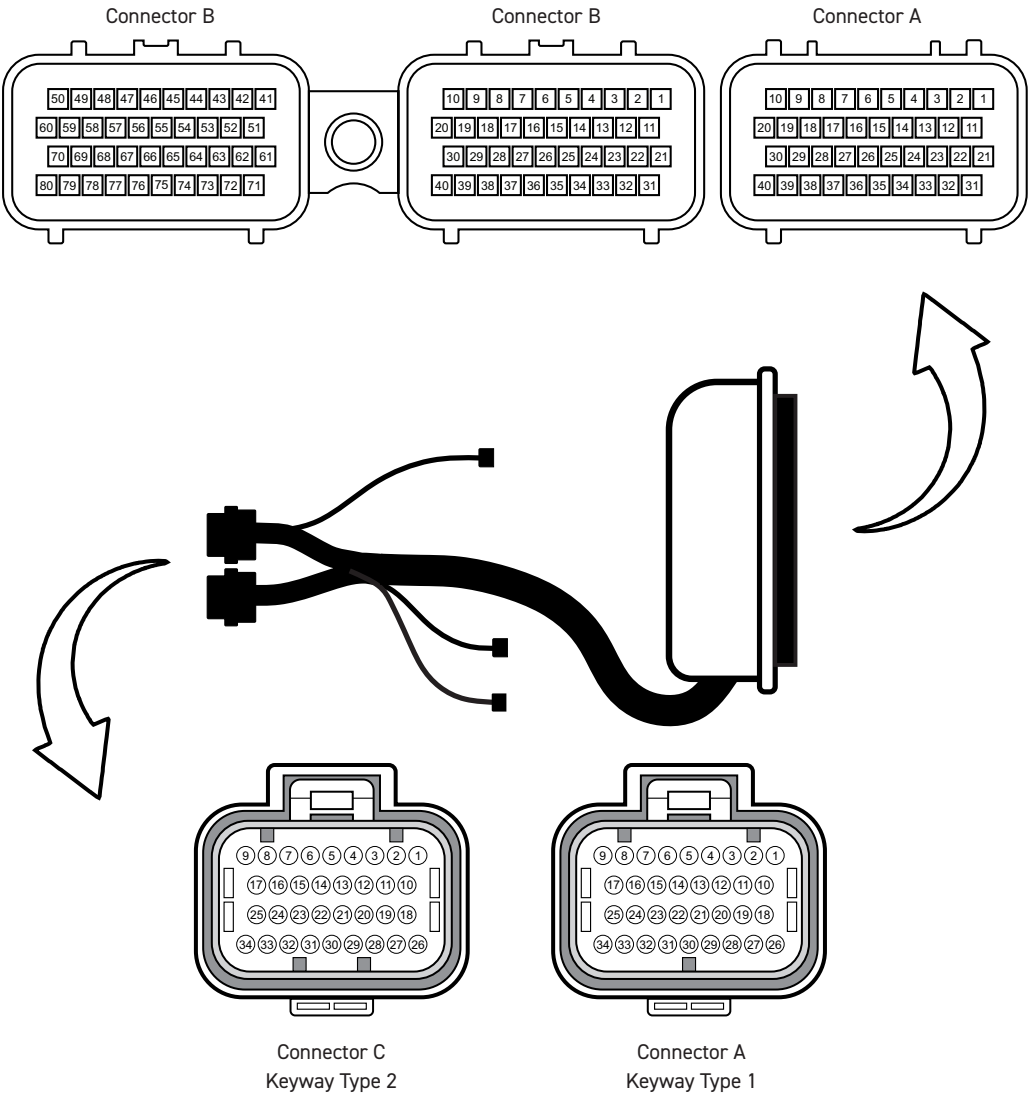


All connectors above are shown with reference to the pin side (front of connectors).

NEXUS S3 ECU CONNECTOR A (KEYWAY TYPE 1)				
Pin	Function	Colour	Vehicle connector	Function
A1	Injector 1	Blue	B50	Injector 1
A2	Injector 2	Blue/Black	B49	Injector 2
A3	Injector 3	Blue/Brown	B48	Injector 3
A4	Injector 4	Blue/Red	B47	Injector 4
A5	Injector 5	Blue/Orange	B46	Injector 5
A6	Injector 6	Blue/Yellow	B45	Injector 6
A7	Injector 7	Blue/Green	B52	Idle Air Control Valve (4)
A8	Injector 8	Blue/Violet	B59	Exhaust gas control (2JZ-GE)
A9	DPO 1	Violet/Black	A16	Tachometer
A10	Battery ground input	Black	B4	Power ground
A11	Battery ground input	Black	B39, B71, B72, B79, B80	Power ground
A12	DPO 2	Violet/Brown	A23	A/C control relay
A13	Ignition switch input	Pink	A1, A24	Ignition switch, MREL
A14	DPO 3	Violet/Red	B70	Boost control solenoid
A15	DPO 4	Violet/Orange	B60	Intake air control
A16	DPO 5	Violet/Yellow	A22	Fuel pump relay
A17	DPO 6	Violet/Green	B54	Idle Air Control Valve (2)
A18	+12V switched input	Red	A31, A32	+12V power from MREL
A19	No connecton	No connecton	No connecton	No connecton
A20	No connecton	No connecton	No connecton	No connecton
A21	HBO 3	Brown/Green	B53	Idle Air Control Valve (1)
A22	HBO 4	Brown/Pink	B55	Idle Air Control Valve (3)
A23	CAN 1 H	White	CAN connector Pin 3	Haltech CAN devices
A24	CAN 1 L	Blue	CAN connector Pin 4	(See page 7 for details)
A25	+12V switched input	Red	No connection	No connection
A26	No connecton	No connecton	No connecton	No connecton
A27	Ignition 1	Yellow/Black	B67	Ignition 1
A28	Ignition 2	Yellow/Red	B66	Ignition 2
A29	Ignition 3	Yellow/Orange	B65	Ignition 3
A30	Ignition 4	Yellow/Green	B64	Ignition 4
A31	Ignition 5	Yellow/Brown	B63	Ignition 5
A32	Ignition 6	Yellow/Blue	B62	Ignition 6
A33	Ignition 7	Yellow/Violet	B74	Purge valve
A34	Ignition 8	Yellow/Gray	A6	Check engine light

ADAPTER PINOUT REFERENCE


Vehicle connector:

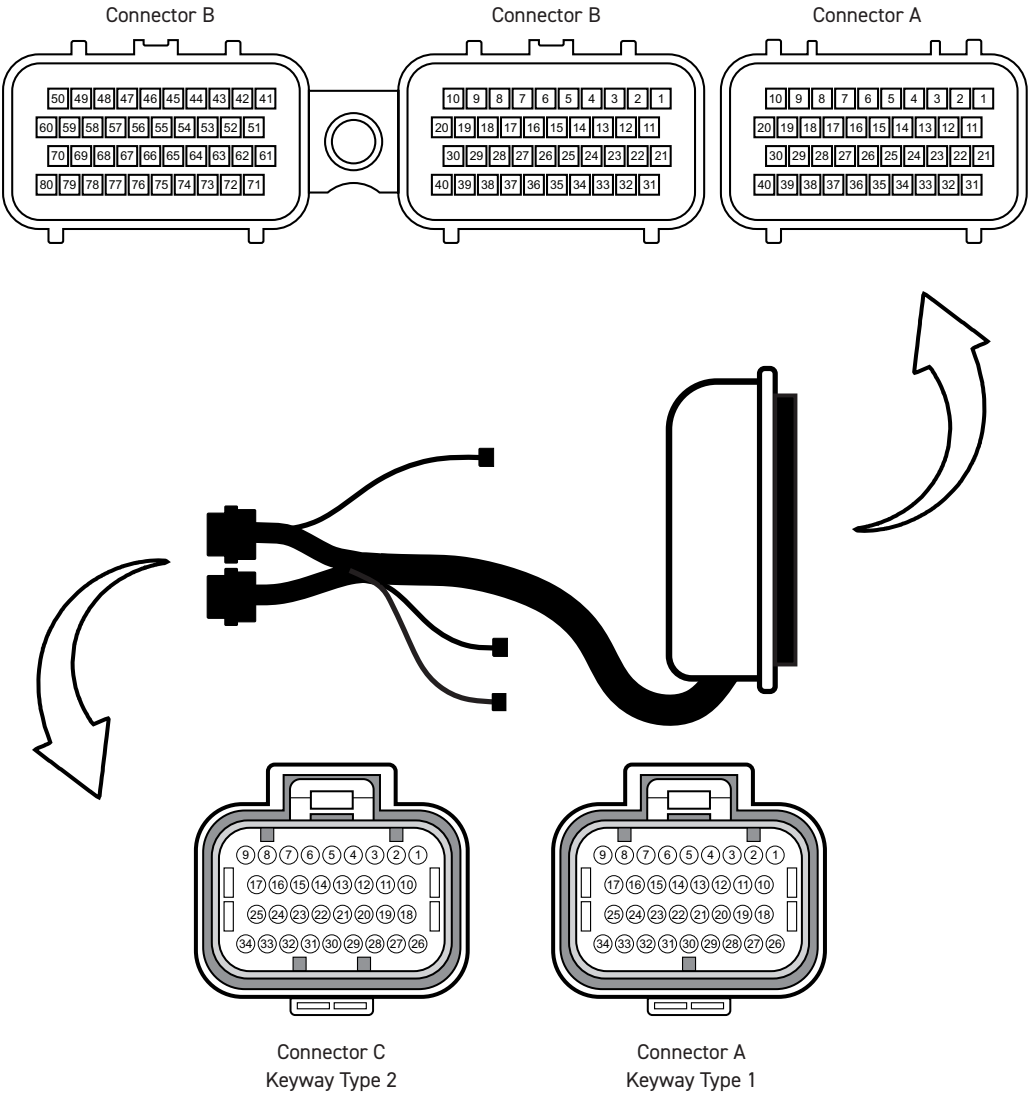

All connectors above are shown with reference to the pin side (front of connectors).

NEXUS S3 ECU CONNECTOR C (KEYWAY TYPE 2)

Pin	Function	Colour	Vehicle connector	Function
C1	Trigger +	White	B17	Crank sensor + (NE)
C2	Trigger -	Black	B7	Crank sensor -
C3	Home +	White	B15	Cam sensor + (G2)
C4	Home -	Black	B5	Cam sensor -
C5	SPI 1	Gray/Brown	To auxiliary connector	Auxiliary IO
C6	SPI 2	Gray/Red	To auxiliary connector	Auxiliary IO
C7	SPI 3	Gray/Orange	A2	Vehicle speed sensor
C8	SPI 4	Gray/Yellow	A34	A/C request switch
C9	No connection	No connection	No connection	No connection
C10	AVI 1	White	B27	Factory O2 sensor #2
C11	AVI 2	White/Yellow	To auxiliary connector	Auxiliary IO
C12	AVI 3	White/Gray	To auxiliary connector	Auxiliary IO
C13	AVI 4	White/Violet	A4	Brake pedal switch
C14	AVI 5	White/Green	B36	MAF sensor
C15	AVI 6	White/Orange	B28	Factory O2 sensor #1
C16	AVI 7	White/Black	B25	Air temperature
C17	AVI 8	White/Brown	B24	Coolant temperature
C18	AVI 9	White/Red	B32	MAP sensor
C19	No connection	No connection	No connection	No connection
C20	No connection	No connection	No connection	No connection
C21	No connection	No connection	No connection	No connection
C22	No connection	No connection	No connection	No connection
C23	Knock 1	White	B30	Knock sensor (front)
C24	Knock 2	White	B29	Knock sensor (rear)
C25	+5V	Orange	B21	Sensor power supply
C26	Signal ground	Black/White	B18, B35	Sensor ground
C27	AVI 10	Light Green	B23	Throttle position sensor
C28	No connection	No connection	No connection	No connection
C29	WBI 1 Heater +	Gray	Wideband conn. Pin 1	Onboard wideband control (See page 6 for details)
C30	WBI 1 Input	Yellow	Wideband conn. Pin 2	
C31	WBI 1 Pump	Red	Wideband conn. Pin 3	
C32	WBI 1 Nernst	Black	Wideband conn. Pin 4	
C33	WBI 1 Heater -	White	Wideband conn. Pin 5	
C34	WBI 1 Cal	Green	Wideband conn. Pin 6	

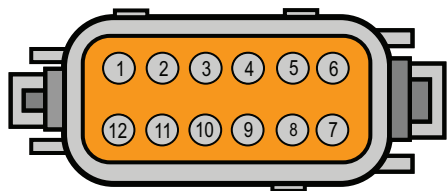

12-pin Auxiliary Connector
Wire side view

Auxiliary Connector

The 12-pin Auxiliary Connector fitted to the adapter harness provides additional inputs that link to the Nexus ECU. The kit is supplied with the opposing connector and spare pins that you can use if you need to connect to these additional inputs. Use an appropriate crimping tool, such as the HT-070307.

Please refer to the pinout information below for details on the spare inputs available for this application.

AUXILIARY CONNECTOR (16 PIN)			
Pin	Connection	Function	Notes
1	From Nexus ECU (A18/A25)	+12V	+12V DC switched supply for relays and solenoids
2	From Nexus ECU (C5)	SPI 1	Spare input
3	From Nexus ECU (C26)	Signal ground	Signal ground for sensors
4	From Nexus ECU (C26)	Signal ground	Signal ground for sensors
5	From Nexus ECU (C11)	AVI 2	Spare input
6	From Nexus ECU (C25)	+5V	+5V DC sensor supply
7	From Nexus ECU (C25)	+5V	+5V DC sensor supply
8	From Nexus ECU (C12)	AVI 3	Spare input
9	From Nexus ECU (C26)	Signal ground	Signal ground for sensors
10	From Nexus ECU (C26)	Signal ground	Signal ground for sensors
11	From Nexus ECU (C6)	SPI 2	Spare input
12	From Nexus ECU (A18/A25)	+12V	+12V DC switched supply for relays and solenoids



WARRANTY CERTIFICATE

At Haltech we make every effort to design and manufacture fault-free products that perform up to or above the market expectations. All our products are covered by a Limited 12 Month Warranty.

Haltech Limited Warranty

Unless specified otherwise, Haltech warrants its products to be free from defects in material or workmanship for a period of 12 months from the date of purchase.

If the Haltech product is found to be defective as mentioned above, it will be replaced or repaired if returned prepaid along with proof of purchase. Proof of purchase in the form of a copy of the original purchase invoice, receipt or bill of sale which indicates that the product is within the warranty period, must be presented to obtain warranty service.

Replacement or repair of a defective product shall constitute the sole liability of Haltech. To the extent permitted by law, the foregoing is exclusive and in lieu of all other warranties or representations, either expressed or implied, including any implied warranty of merchantability or fitness. In no event shall Haltech, be liable for special or consequential damages.

Product Returns

Please include a copy of the original purchase invoice, receipt or bill of sale along with the unused, undamaged product and its original packaging. Any product returned with missing accessory items or packaging will incur extra charges to return the item to a re-saleable condition.

All product returns must be sent via a freight method with adequate tracking, insurance and proof of delivery services. Haltech will not be held responsible for product returns lost during transit.

Returns of Products Supplied in Sealed Packaging

The sale of any sensor or accessory supplied in sealed packaging is strictly non-refundable if the sealed packaging has been opened or tampered with. This will be clearly noted on the product packaging. If you do not accept these terms please return the sensor in its original unopened packaging within 30 days for a full refund.

A sensor or accessory product may be returned after 30 days of purchase (with its sealed packaging intact) for credit only (no refunds given) and will be subject to a 10% restocking fee.

Installation of Haltech Products

No responsibility whatsoever is accepted by Haltech for the fitment of Haltech Products. The onus is clearly on the installer to ensure that both their knowledge and the parts selected are correct for that particular application. Any damage to parts or consequential damage or costs resulting from the incorrect installation of Haltech products are totally the responsibility of the installer.

Always disconnect the battery when doing electrical work on your vehicle. Avoid sparks, open flames or use of electrical devices near flammable substances. Do not run the engine with a battery charger connected as this could damage the ECU and other electrical equipment.

Do not overcharge the battery or reverse the polarity of the battery or any charging unit. Disconnect the Haltech ECU from the electrical system whenever doing any welding on the vehicle by unplugging the wiring harness connector from the ECU.

After completing the ECU installation, make sure there is no wiring left un-insulated. Uninsulated wiring can cause sparks, short circuits and in some cases fire. Before attempting to run the engine ensure there are no leaks in the fuel system.

All fuel system components and wiring should be mounted away from heat sources, shielded if necessary and well ventilated. Always ensure that you follow workshop safety procedures. If you're working underneath a jacked-up car, always use safety stands!

Haltech Off-Road Usage Policy

In many states it is unlawful to tamper with your vehicle's emissions equipment. Haltech products are designed and sold for sanctioned off-road/competition non-emissions controlled vehicles only and may never be used on a public road or highway.

Using Haltech products for street/road use on public roads or highways is prohibited by law unless a specific regulatory exemption exists (more information can be found on the SEMA Action Network website www.sema-san.com/emissions for state by state details in the USA).

It is the responsibility of the installer and/or user of this product to ensure compliance with all applicable local and federal laws and regulations. Please check with your local vehicle authority before purchasing, using or installing any Haltech product.



Haltech Australia

17 Durian Place,
Wetherill Park NSW 2164
Australia
Phone: +61 2 9729 0999
Email: aus@haltech.com

Haltech New Zealand

Grey Lynn Auckland, NZ 1021
Phone: 09 887 0616
Email: nz@haltech.com

Haltech USA East

750 Miles Point Way,
Lexington, KY USA 40510
Phone: (888) 298 8116
Email: usa@haltech.com

Haltech USA West

Race Winning Brands,
10800 Valley View Street,
Cypress, CA 90630
Phone: (888) 298 8116
Email: usa@haltech.com

Haltech UK

Unit 1, Miras Business Estate,
Keys Park Road, Hednesford,
WS12 2FS
Phone: +44 121 285 6650
Email: uk@haltech.com

Haltech Europe

Ottogasse 2A,
2333 Leopoldsdorf, Austria
Phone: +43 720 883968
Email: europe@haltech.com